

# GreenPerform Batten G3 BN398C

## BN398X LED69/865 L1200 L1 W WB

GreenPerform batten BN398C is a cost competitive linear solution with good performance and multiple lumen output for retail and industry applications. It offers surface mount and suspension installations to cater for different mounting options. Its multiple optic designs accommodate different applications as well.

### Product data

| General information                      |                   |
|--|-------------------|
| Light source color                       | 865 cool daylight |
| Optical cover/lens type                  | -                 |
| Control interface                        | BLE               |
| Protection class IEC                     | Safety class I    |
| Flammability mark                        | -                 |
| CE mark                                  | CE mark           |
| Number of products on MCB of 16 A type B | 13                |
| Light source engine type                 | LED               |

| Operating and electrical |             |
|--------------------------|-------------|
| Input Voltage            | 220-240 V   |
| Input Frequency          | 50 or 60 Hz |
| Inrush current           | 19 A        |
| Power Factor (Min)       | 0.95        |

| Controls and dimming |              |
|----------------------|--------------|
| Dimmable             | Wireless Dim |

| Mechanical and housing      |                         |
|-----------------------------|-------------------------|
| Housing Material            | Steel                   |
| Optical cover/lens material | Polymethyl methacrylate |
| Optical cover/lens finish   | Clear                   |
| Overall length              | 1188 mm                 |
| Overall width               | 58 mm                   |
| Overall height              | 58 mm                   |
| Color                       | White                   |

| Approval and application     |                          |
|------------------------------|--------------------------|
| Ingress protection code      | IP20 [ Finger-protected] |
| Mech. impact protection code | IK03 [ 0.3 J]            |

| Initial performance (IEC compliant) |         |
|-------------------------------------|---------|
| Initial luminous flux (system flux) | 6900 lm |

## GreenPerform Batten G3 BN398C

|                                |             |
|--------------------------------|-------------|
| Luminous flux tolerance        | +/-10%      |
| Initial LED luminaire efficacy | 127 lm/W    |
| Init. Corr. Color Temperature  | 6500 K      |
| Init. Color Rendering Index    | >80         |
| Initial chromaticity           | SDCM<5      |
| Initial input power            | 37.8 46.2 W |
| Power consumption tolerance    | +/-10%      |

### Application conditions

|                           |               |
|---------------------------|---------------|
| Ambient temperature range | -20 to +40 °C |
|---------------------------|---------------|


### Product data

|                   |                 |
|-------------------|-----------------|
| Full product code | 692382865764200 |
|-------------------|-----------------|

|                                 |                                |
|---------------------------------|--------------------------------|
| Order product name              | BN398X LED69/865 L1200 L1 W WB |
| EAN/UPC - Product               | 6923828657642                  |
| Order code                      | 911401551102                   |
| Numerator - Quantity Per Pack   | 1                              |
| Numerator - Packs per outer box | 1                              |
| Material Nr. (12NC)             | 911401551102                   |
| Net Weight (Piece)              | 1.690 kg                       |



## Dimensional drawing

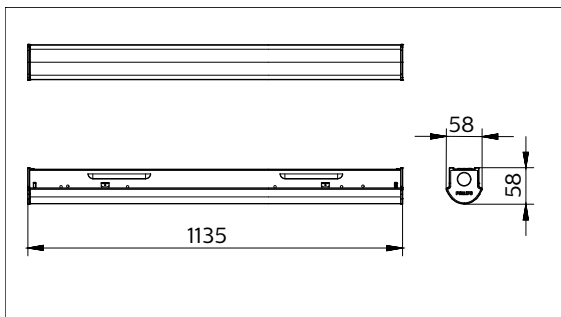

BN398X LED69/865 L1200 L1 W WB

