



GreenPerform Highbay HT

BY687P LED250/CW PSR WB G2 XT EN

865 cool daylight - Power supply unit regulating - Wide beam - Tempered glass

The GreenPerform Highbay High Ta is an ideal solution for high temperatures and special heavy industry usage, enables a safe working environment with leading specifications and offers comfortable light. In the meantime, lower your overall maintenance costs.

Product data

General Information	
Beam angle of light source	- °
Lamp colour code	865 cool daylight
Light source replaceable	No
Number of gear units	1 unit
Driver/power unit/transformer	PSR [Power supply unit regulating]
Driver included	Yes
Optic type	WB [Wide beam]
Optical cover/lens type	GT [Tempered glass]
Luminaire light beam spread	93°
Control interface	-
Connection	Flying leads/wires
Cable	Cable 0.3 m without plug
Protection class IEC	Safety class I (I)
Glow-wire test	650/5 [Temperature 650 °C, duration 5 s]
Flammability mark	F [For mounting on normally flammable surfaces]

CE mark	CE mark
ENEC mark	-
Warranty period	3 years
Constant light output	No
Number of products on MCB (16 A type B)	6
EU RoHS compliant	No
LED engine type	LED

Operating and Electrical

Input Voltage	220 to 240 V
Input frequency	50 to 60 Hz
Inrush current	38.3 A
Inrush time	625 ms
Power factor (min.)	0.95

GreenPerform Highbay HT

Controls and Dimming

Dimmable	Yes
----------	-----

Mechanical and Housing

Housing material	Aluminum die-cast
Reflector material	-
Optic material	Polycarbonate
Optical cover/lens material	Tempered glass
Fixation material	-
Optical cover/lens finish	Clear
Overall height	165 mm
Overall diameter	520 mm
Colour	Silver

Approval and Application

Ingress protection code	IP65 [Dust penetration-protected, jet-proof]
Mech. impact protection code	IK07 [2 J reinforced]

Initial Performance (IEC Compliant)

Initial luminous flux (system flux)	25000 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	135 lm/W
Lamp colour temperature	6500 K
Colour Rendering Index	>80
Initial chromaticity	(0.313,0.324)SDCM<5

Initial input power	185 W
Power consumption tolerance	+/-10%

Over Time Performance (IEC Compliant)


Median useful life L70B50	75000 h
Median useful life L80B50	60000 h
Median useful life L90B50	45000 h

Application Conditions


Ambient temperature range	-30 to +60 °C
Maximum dimming level	10% (depends on dimmer, ELV)
Suitable for random switching	No

Product Data

Full product code	911401515151
Order product name	BY687P LED250/CW PSR WB G2 XT EN
Order code	911401515151
Numerator – quantity per pack	1
SAP numerator – packs per outer box	1
Material no. (12 NC)	911401515151
Net Weight (Piece)	8.999 kg



Dimensional drawing

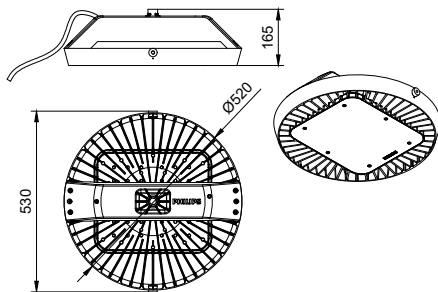

GreenPerform High-bay gen2 BY687P-BY689P

GreenPerform Highbay HT

