



# Coreview Troffer G3

## RC420B LED35S/840 PSD W60L60

Wide beam - Opal - 120° -

Indirect LED troffer delivering soft and uniform light with visual comfort

### Warnings and Safety

- The product is IPX0 & as such is not protected against water ingress & as such we strongly recommend that the environment in which the luminaire is to be installed is suitably checked
- If the above advice is not taken and the luminaires are subject to water ingress, Philips / Signify cannot guarantee safe failure & product warranty will become void

### Product data

General information	
Light source color	840 neutral white
Light source replaceable	No
Number of gear units	1 unit
Driver included	Yes
Optic type	Wide beam
Optical cover/lens type	Opal
Luminaire light beam spread	120°
Control interface	DALI
Connection	Internal connector
Protection class IEC	Safety class I
Glow-wire test	Temperature 600 °C, duration 30 s
CE mark	CE mark
Warranty period	3 years
Constant light output	No
Number of products on MCB of 16 A type B	24
Light source engine type	LED

Operating and electrical	
Input Voltage	220 to 240 V
Input Frequency	50 or 60 Hz
Inrush current	22 A
Inrush time	2750 ms
Power Factor (Min)	0.9
Controls and dimming	
Dimmable	Yes
Mechanical and housing	
Housing Material	Metal
Optic material	Polystyrene
Optical cover/lens material	Polymethyl methacrylate
Fixation material	Steel
Optical cover/lens finish	Opal
Overall length	597 mm
Overall width	597 mm

## Coreview Troffer G3

Overall height	121 mm
Color	White

### Approval and application

Ingress protection code	IP20 [ Finger-protected]
Mech. impact protection code	IK03 [ 0.3 J]

### Initial performance (IEC compliant)

Initial luminous flux (system flux)	3600 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	100 lm/W
Init. Corr. Color Temperature	4000 K
Init. Color Rendering Index	>80
Initial chromaticity	(0.43, 0.40) SDCM<4
Initial input power	36 W
Power consumption tolerance	+/-10%

### Over time performance (IEC compliant)

Median useful life L70B50	50000 h
---------------------------	---------

### Application conditions


Ambient temperature range	-20 to +40 °C
Maximum dim level	1%

### Product data

Full product code	911401590331
Order product name	RC420B LED35S/840 PSD W60L60
Order code	911401590331
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	2
Material Nr. (12NC)	911401590331
Copy Net Weight (Piece)	4.699 kg



## Dimensional drawing

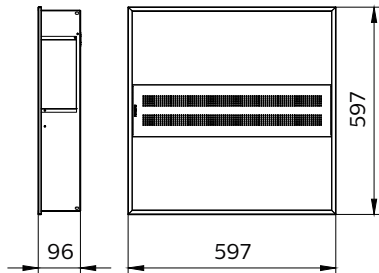

RC420B LED35S/840 PSD W60L60

