



# SlimBalance

## SP551P LED45S 840 L120 PSD SI GM

- - Wide beam - Linear-lens array in polycarbonate cover - 60°

SlimBalance is a full range of product family with sleek and elegant design helps to create attractive and differentiated space for customers. The family covers different length (600mm, 1200mm,1500mm), different end cap (round, square) and different light distribution (direct, indirect).;Its office compliant version delivers comfortable light with good quality.

### Warnings and Safety

- The product is IPX0 & as such is not protected against water ingress & as such we strongly recommend that the environment in which the luminaire is to be installed is suitably checked
- If the above advice is not taken and the luminaires are subject to water ingress, Philips / Signify cannot guarantee safe failure & product warranty will become void

### Product data

General information	
Beam angle of light source	- °
Light source color	840 neutral white
Light source replaceable	No
Number of gear units	1 unit
Driver/power unit/transformer	-
Driver included	Yes
Optic type	Wide beam
Optical cover/lens type	Linear-lens array in polycarbonate cover
Luminaire light beam spread	60°
Control interface	DALI
Connection	Flying leads/wires
Cable	-
Protection class IEC	Safety class I

Glow-wire test	Temperature 650 °C, duration 30 s
Flammability mark	-
CE mark	CE mark
ENEC mark	-
Warranty period	3 years
Constant light output	No
Number of products on MCB of 16 A type B	24
EU RoHS compliant	Yes
Light source engine type	LED

### Operating and electrical

Input Voltage	220/240 V
Input Frequency	50 to 60 Hz
Inrush current	22 A

# SlimBalance

Inrush time	275 ms
Power Factor (Min)	0.95

## Controls and dimming

Dimmable	Yes
----------	-----

## Mechanical and housing

Housing Material	Metal
Reflector material	-
Optic material	Polycarbonate
Optical cover/lens material	Polycarbonate
Fixation material	Steel
Optical cover/lens finish	Opal
Overall length	1230 mm
Overall width	70 mm
Overall height	105 mm
Color	Silver

## Approval and application

Ingress protection code	IP20 [ Finger-protected]
Mech. impact protection code	IK03 [ 0.3 J]

## Initial performance (IEC compliant)

Initial luminous flux (system flux)	4500 lm
Luminous flux tolerance	+/-10%

Initial LED luminaire efficacy	125 lm/W
Init. Corr. Color Temperature	4000 K
Init. Color Rendering Index	>80
Initial chromaticity	(0.38, 0.38) SDCM< 3 ( uplight< 4 )
Initial input power	36 W
Power consumption tolerance	+/-10%

## Over time performance (IEC compliant)

Median useful life L70B50	50000 h
---------------------------	---------

## Application conditions


Ambient temperature range	-20 to +40 °C
Maximum dim level	1%

## Product data

Full product code	911401525341
Order product name	SP551P LED45S 840 L120 PSD SI GM
Order code	911401525341
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	2
Material Nr. (12NC)	911401525341
Net Weight (Piece)	3.449 kg



## Dimensional drawing

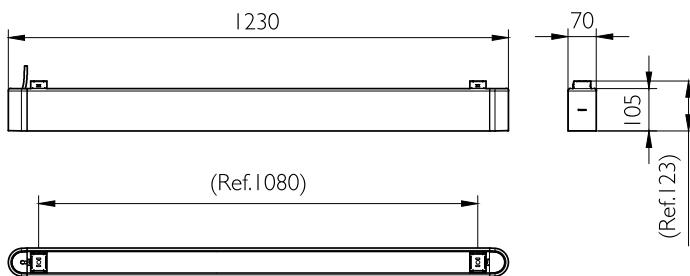

SP551P LED45S 840 L120 PSD SI GM

