



# UniEdge

## BCP390 3LED RGB 24V 3x90 DMX D3

UniEdge - 67 lm - 7 W - -

UniEdge is a surface mounted, exterior-rated and compact sized architectural LED edge lighting luminaire that is designed for façade and outdoor decorative lighting applications. The robust mechanical and unique optical designs make UniEdge ideal for edges lighting on windows and doors inner frames, building façades, landmarks and monuments. Available in white, monochromatic colors, RGB, RGBW and tunable white. Unique spread lens with DMX control option available to give architects and designers the freedom to explore a wide range of concepts and design with no limitations.

### Warnings and Safety

- For outdoor use only

### Product data

General information	
Light source color	Red, green and blue
Driver included	No
Optical cover/lens type	Tempered glass
Control interface	Dynamix DMX
Connection	2 Push-in connector 5-pole
Cable	2 cables 0.3m with connector 5-pole
Protection class IEC	Safety class III
Flammability mark	For mounting on normally flammable surfaces
CE mark	-

Operating and electrical	
Input Voltage	24 V
Input Frequency	- Hz

Inrush current	70 A
Power Factor (Min)	-
Power Factor (Nom)	-

Controls and dimming	
Dimmable	Yes

Mechanical and housing	
Housing Material	Aluminum die cast
Optical cover/lens material	Polymethyl methacrylate
Effective projected area	0.014 m <sup>2</sup>
Color	Dark gray
Dimensions (Height x Width x Depth)	NaN x NaN x NaN mm

## Approval and application

Ingress protection code	IP66 [ Dust penetration-protected, jet-proof]
Mech. impact protection code	IK06 [ 1 J]

## Initial performance (IEC compliant)

Initial luminous flux (system flux)	67 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	6.7 lm/W
Init. Corr. Color Temperature	-
Init. Color Rendering Index	-
Initial chromaticity	-
Initial input power	7 W
Power consumption tolerance	+/-10%

## Application conditions


Ambient temperature range	-40 to +50 °C
---------------------------	---------------

## Product data

Full product code	871951492349299
Order product name	BCP390 3LED RGB 24V 3x90 DMX D3
EAN/UPC - Product	8719514923492
Order code	911401737273
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	24
Material Nr. (12NC)	911401737273
Net Weight (Piece)	0.799 kg



## Dimensional drawing

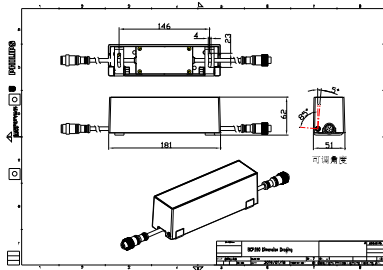

BCP390 3LED RGB 24V 3x90 DMX D3

