



# UniEdge

## BCP390 4LED 30K 24V 3x90 D3

UniEdge - 127 lm - 10 W - -

UniEdge is a surface mounted, exterior-rated and compact sized architectural LED edge lighting luminaire that is designed for façade and outdoor decorative lighting applications. The robust mechanical and unique optical designs make UniEdge ideal for edges lighting on windows and doors inner frames, building façades, landmarks and monuments. Available in white, monochromatic colors, RGB, RGBW and tunable white. Unique spread lens with DMX control option available to give architects and designers the freedom to explore a wide range of concepts and design with no limitations.

### Warnings and Safety

- For outdoor use only

### Product data

General information	
Light source color	Warm white
Driver included	No
Optical cover/lens type	Tempered glass
Control interface	-
Connection	2 Push-in connector 2-pole
Cable	2 cables 0.3m with connector 2-pole
Protection class IEC	Safety class III
Flammability mark	For mounting on normally flammable surfaces
CE mark	-

Operating and electrical	
Input Voltage	24 V
Input Frequency	- Hz

Inrush current	70 A
Power Factor (Min)	-
Power Factor (Nom)	-

Controls and dimming	
Dimmable	No

Mechanical and housing	
Housing Material	Aluminum die cast
Optical cover/lens material	Polymethyl methacrylate
Effective projected area	0.014 m <sup>2</sup>
Color	Dark gray
Dimensions (Height x Width x Depth)	NaN x NaN x NaN mm

## Approval and application

Ingress protection code	IP66 [ Dust penetration-protected, jet-proof]
Mech. impact protection code	IK06 [ 1 J]

## Initial performance (IEC compliant)

Initial luminous flux (system flux)	127 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	12.7 lm/W
Init. Corr. Color Temperature	-
Init. Color Rendering Index	80
Initial chromaticity	4 SDCM
Initial input power	10 W
Power consumption tolerance	+/-10%

## Application conditions


Ambient temperature range	-40 to +50 °C
---------------------------	---------------

## Product data

Full product code	871951492352299
Order product name	BCP390 4LED 30K 24V 3x90 D3
EAN/UPC - Product	8719514923522
Order code	911401737303
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	24
Material Nr. (12NC)	911401737303
Net Weight (Piece)	0.799 kg



## Dimensional drawing

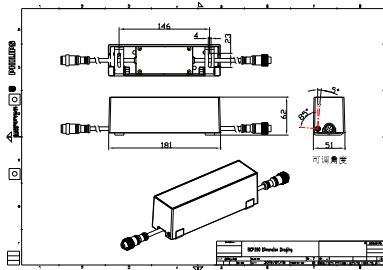

BCP390 4LED 30K 24V 3x90 D3

