



UniEdge

BCP390 4LED 40K 24V 3x90 D3

UniEdge - 144 lm - 10 W - -

UniEdge is a surface mounted, exterior-rated and compact sized architectural LED edge lighting luminaire that is designed for façade and outdoor decorative lighting applications. The robust mechanical and unique optical designs make UniEdge ideal for edges lighting on windows and doors inner frames, building façades, landmarks and monuments. Available in white, monochromatic colors, RGB, RGBW and tunable white. Unique spread lens with DMX control option available to give architects and designers the freedom to explore a wide range of concepts and design with no limitations.

Warnings and Safety

- For outdoor use only

Product data

| General information | | Inrush current | |
|--------------------------|---------------------------------------------|-------------------------------------|-------------------------|
| Light source color | Neutral white | Inrush current | 70 A |
| Driver included | No | Power Factor (Min) | - |
| Optical cover/lens type | Tempered glass | Power Factor (Nom) | - |
| Control interface | - | Controls and dimming | |
| Connection | 2 Push-in connector 2-pole | Dimmable | No |
| Cable | 2 cables 0.3m with connector 2-pole | Mechanical and housing | |
| Protection class IEC | Safety class III | Housing Material | Aluminum die cast |
| Flammability mark | For mounting on normally flammable surfaces | Optical cover/lens material | Polymethyl methacrylate |
| CE mark | - | Effective projected area | 0.014 m ² |
| Operating and electrical | | Color | Dark gray |
| Input Voltage | 24 V | Dimensions (Height x Width x Depth) | NaN x NaN x NaN mm |
| Input Frequency | - Hz | | |

Approval and application

| | |
|------------------------------|-----------------------------------------------|
| Ingress protection code | IP66 [Dust penetration-protected, jet-proof] |
| Mech. impact protection code | IK06 [1 J] |

Initial performance (IEC compliant)

| | |
|-------------------------------------|-----------|
| Initial luminous flux (system flux) | 144 lm |
| Luminous flux tolerance | +/-10% |
| Initial LED luminaire efficacy | 14.4 lm/W |
| Init. Corr. Color Temperature | - |
| Init. Color Rendering Index | 80 |
| Initial chromaticity | 4 SDCM |
| Initial input power | 10 W |
| Power consumption tolerance | +/-10% |

Application conditions


| | |
|---------------------------|---------------|
| Ambient temperature range | -40 to +50 °C |
|---------------------------|---------------|

Product data

| | |
|---------------------------------|-----------------------------|
| Full product code | 871951492354699 |
| Order product name | BCP390 4LED 40K 24V 3x90 D3 |
| EAN/UPC - Product | 8719514923546 |
| Order code | 911401737323 |
| Numerator - Quantity Per Pack | 1 |
| Numerator - Packs per outer box | 24 |
| Material Nr. (12NC) | 911401737323 |
| Net Weight (Piece) | 0.799 kg |



Dimensional drawing

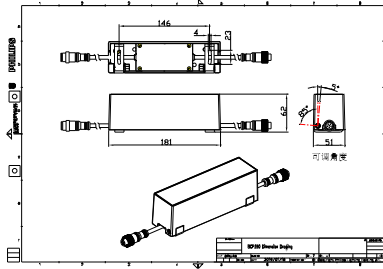

BCP390 4LED 40K 24V 3x90 D3

