



# Mini500 G3

## BCP500 G2 LED140/NW ACD2 IS S-WB

840 neutral white - Wide beam

The Mini 500 G3 is designed for petrol-station canopies and low/high-bay applications, this ultra-efficient retrofit fixture offers outstanding light quality, effective thermal management and a long lifespan. For further energy savings, you could select either simple movement-detector sensor or movement detection combined with a daylight sensor.

### Product data

General Information	
Light source colour	840 neutral white
Light source replaceable	No
Number of gear units	1 unit
Driver/power unit/transformer	PSD [ Power supply unit with DALI interface]
Driver included	Yes
Optic type	WB [ Wide beam]
Optical cover/lens type	GT [ Tempered glass]
Luminaire light beam spread	110°
Control interface	DALI
Connection	Flying leads/wires
Cable	Cable 0.3 m without plug
Protection class IEC	Safety class I (I)
Glow-wire test	650/5 [ Temperature 650 °C, duration 5 s]
Flammability mark	F [ For mounting on normally flammable surfaces]
CE mark	CE mark
ENEC mark	-
Warranty period	3 years
Constant light output	No

Number of products on MCB (16 A type B)		6
Light source engine type	LED	
Operating and Electrical		
Input Voltage	220 to 240 V	
Input frequency	50 to 60 Hz	
Inrush current	53 A	
Inrush time	300 ms	
Power factor (min.)	0.95	
Controls and Dimming		
Dimmable	Yes	
Mechanical and Housing		
Housing material	Aluminum die-cast	
Reflector material	-	
Optic material	Polycarbonate	
Optical cover/lens material	Tempered glass	
Fixation material	-	
Optical cover/lens finish	Clear	

## Mini500 G3

Overall length	335 mm
Overall width	335 mm
Colour	White

### Approval and Application

Ingress protection code	IP54 [ Dust accumulation-protected, splash-proof]
Mech. impact protection code	IK07 [ 2 J reinforced]

### Initial Performance (IEC Compliant)

Initial luminous flux (system flux)	14000 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	140 lm/W
Init. Corr. Colour Temperature	4000 K
Init. Colour rendering index	>80
Initial chromaticity	(0.38.0.38)SDCM<5
Initial input power	100 W
Power consumption tolerance	+/-10%

### Over Time Performance (IEC Compliant)

Median useful life L70B50	50000 h
---------------------------	---------

Median useful life L80B50	40000 h
Median useful life L90B50	30000 h

### Application Conditions


Ambient temperature range	-20 to +40 °C
Maximum dimming level	10%
Suitable for random switching	Yes

### Product Data

Full product code	911401535851
Order product name	BCP500 G2 LED140/NW ACD2 IS S-WB
Order code	01535851
SAP numerator – quantity per pack	1
Numerator – packs per outer box	1
SAP material	911401535851
SAP net weight (piece)	8.099 kg



## Dimensional drawing

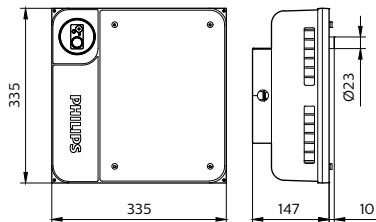

BCP500 G2 LED140/NW ACD2 IS S-WB

