



Truefashion Projector GCGM

RS700B LED30 930PW PSU MB WH

Lens -

Truefashion Projector is offering a retail segment with attractive outlook design, excellent quality of light & dedicated light recipe as well as system connectivity, to create a comfortable ambiance and impressive shopping experience to stimulate the store sales for retail customers.

Warnings and Safety

- 3 years

Product data

| General information | | Controls and dimming | |
|------------------------------------------|-----------------|------------------------------|--------------------------|
| Light source color | 930 warm white | Dimmable | No |
| Optical cover/lens type | Lens | Mechanical and housing | |
| Control interface | - | Housing Material | Aluminum |
| Protection class IEC | Safety class II | Optical cover/lens material | Polymethyl methacrylate |
| CE mark | CE mark | Optical cover/lens finish | - |
| Number of products on MCB of 16 A type B | 1 | Overall height | 100 mm |
| Light source engine type | LED | Overall diameter | 111 mm |
| Operating and electrical | | Color | White RAL 9003 |
| Input Voltage | 220 to 240 V | Approval and application | |
| Input Frequency | 50 or 60 Hz | Ingress protection code | IP20 [Finger-protected] |
| Power Factor (Min) | 0.95 | Mech. impact protection code | - |

Truefashion Projector GCGM

Initial performance (IEC compliant)

| | |
|-------------------------------------|---------|
| Initial luminous flux (system flux) | 2844 lm |
| Luminous flux tolerance | +/-10% |
| Initial LED luminaire efficacy | 92 lm/W |
| Init. Corr. Color Temperature | 3000 K |
| Init. Color Rendering Index | >90 |
| Initial input power | 31 W |
| Power consumption tolerance | +/-10% |

Application conditions


| | |
|---------------------------|---------------|
| Ambient temperature range | -15 to +35 °C |
|---------------------------|---------------|

Product data

| | |
|---------------------------------|------------------------------|
| Full product code | 911401520771 |
| Order product name | RS700B LED30 930PW PSU MB WH |
| Order code | 911401520771 |
| Numerator - Quantity Per Pack | 1 |
| Numerator - Packs per outer box | 1 |
| Material Nr. (12NC) | 911401520771 |
| Copy Net Weight (Piece) | 0.630 kg |



Dimensional drawing

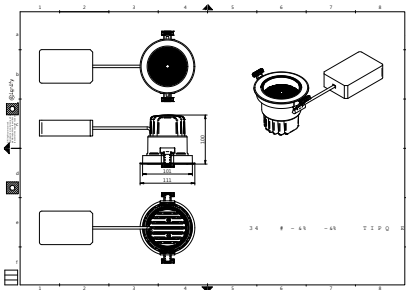

RS700B LED30 930PW PSU MB WH

