



Truefashion Projector GCGM

RS700B LED40 940PW PSU MB WH HB

Lens -

Truefashion Projector is offering a retail segment with attractive outlook design, excellent quality of light & dedicated light recipe as well as system connectivity, to create a comfortable ambiance and impressive shopping experience to stimulate the store sales for retail customers.

Warnings and Safety

- 3 years

Product data

General information		Controls and dimming	
Light source color	940 neutral white	Dimmable	No
Optical cover/lens type	Lens	Mechanical and housing	
Control interface	-	Housing Material	Aluminum
Protection class IEC	Safety class II	Optical cover/lens material	Polymethyl methacrylate
CE mark	CE mark	Optical cover/lens finish	-
Number of products on MCB of 16 A type B	1	Overall height	100 mm
Light source engine type	LED	Overall diameter	111 mm
Operating and electrical		Color	White RAL 9003
Input Voltage	220 to 240 V	Approval and application	
Input Frequency	50 or 60 Hz	Ingress protection code	IP20 [Finger-protected]
Power Factor (Min)	0.96	Mech. impact protection code	-

Truefashion Projector GCGM

Initial performance (IEC compliant)

Initial luminous flux (system flux)	2293 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	57 lm/W
Init. Corr. Color Temperature	4000 K
Init. Color Rendering Index	>90
Initial input power	40 W
Power consumption tolerance	+/-10%

Application conditions


Ambient temperature range	-15 to +35 °C
---------------------------	---------------

Product data

Full product code	911401522371
Order product name	RS700B LED40 940PW PSU MB WH HB
Order code	911401522371
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1
Material Nr. (12NC)	911401522371
Copy Net Weight (Piece)	0.630 kg



Dimensional drawing

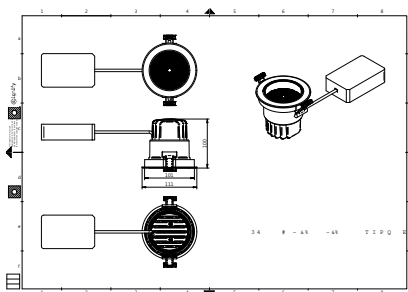

RS700B LED40 940PW PSU MB WH HB

