



GreenPerform Highbay Rectangular

BY570P LED150/NW PSU NB GM

Transparent dome -

The GreenPerform Highbay Rectangular continues the GreenPerform family's enviable reputation for reliable performance, provi. Not only does it deliver Unified Glare Rating (UGR) control with its optimized optical design, it also promises leading system efficiency, compact dimensions and extended long-term quality. Optimized for almost all industrial applications, it is also fully compatible with IoT software such as the Interact scalable system.

Product data

General information		Controls and dimming	
Light source color	840 neutral white	Dimmable	No
Optical cover/lens type	Transparent dome		
Control interface	-	Mechanical and housing	
Protection class IEC	Safety class I	Housing Material	Aluminum die cast
CE mark	CE mark	Optical cover/lens material	Polycarbonate
Number of products on MCB of 16 A type B	6	Optical cover/lens finish	Clear
Light source engine type	LED	Overall length	23.6 mm
		Overall width	11 mm
		Overall height	34 mm
		Color	Gray
Operating and electrical		Approval and application	
Input Voltage	220 to 240 V	Ingress protection code	IP65 [Dust penetration-protected, jet-proof]
Input Frequency	50 or 60 Hz		
Power Factor (Min)	0.95		


GreenPerform Highbay Rectangular

Mech. impact protection code	IK06 [1 J]
Initial performance (IEC compliant)	
Initial luminous flux (system flux)	15000 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	135 lm/W
Init. Corr. Color Temperature	4000 K
Init. Color Rendering Index	>80
Initial input power	111 W
Power consumption tolerance	+/-10%
Application conditions	
Ambient temperature range	-30 to +50 °C

Product data	
Full product code	911401594261
Order product name	BY570P LED150/NW PSU NB GM
Order code	911401594261
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	2
Material Nr. (12NC)	911401594261
Copy Net Weight (Piece)	3.199 kg



Dimensional drawing

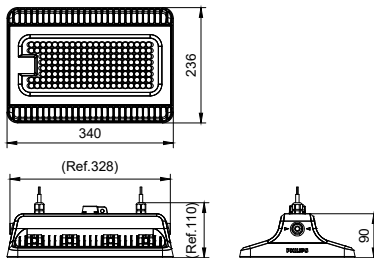

BY570P LED150/NW PSU NB GM

