

UNILinear Flex

BGC401 650LM 10W 3000K L5 1515 T G

UNILinear Flex - 3250 lm - 46 W - 3000 K

UNILinear Flex is really and excellently waterproof and anti-dust LED strips with professional design to guarantee lighting performance. Thanks to filling with anti-UV polyurethane and processing by irrigation methods sealing glue, it not only ensure high quality of lighting color consistency but also protect products outdoor against from harsh environments outdoors. It's can be used for decoration lighting and guidance lighting outdoors, the higher CRI (80) delivers good performance of lighting in color rendering.

Product data

| General information | | Controls and dimming | |
|--------------------------|--------------------------|-------------------------------------|---|
| Light source color | 930 warm white | Dimmable | No |
| Driver included | No | | |
| Optical cover/lens type | Opal | Mechanical and housing | |
| Control interface | - | Housing Material | Silicon rubber |
| Connection | Flying leads/wires | Optical cover/lens material | Silicon rubber |
| Cable | Cable 0.6 m without plug | Fixation material | Stainless steel |
| Protection class IEC | Safety class III | Overall length | 15 mm |
| CE mark | CE mark | Overall width | 5000 mm |
| Constant light output | No | Overall height | 15 mm |
| | | Color | White |
| Operating and electrical | | Approval and application | |
| Input Voltage | 24 DC V | Ingress protection code | IP66 [Dust penetration-protected, jet-proof] |
| Input Frequency | - Hz | Mech. impact protection code | IK04 [0.5 J standard plus] |
| Power Factor (Min) | - | | |
| | | Initial performance (IEC compliant) | |
| | | Initial luminous flux (system flux) | 3250 lm |

UNILinear Flex

| | |
|--------------------------------|-----------|
| Luminous flux tolerance | -10%,+15% |
| Initial LED luminaire efficacy | 65 lm/W |
| Init. Corr. Color Temperature | 3000 K |
| Init. Color Rendering Index | >90 |
| Initial chromaticity | 4 SDCM |
| Initial input power | 46 W |
| Power consumption tolerance | +/-10% |

Application conditions

| | |
|---------------------------|---------------|
| Ambient temperature range | -40 to +45 °C |
|---------------------------|---------------|


Product data

| | |
|-------------------|-----------------|
| Full product code | 692382863726200 |
|-------------------|-----------------|

| | |
|---------------------------------|------------------------------------|
| Order product name | BGC401 650LM 10W 3000K L5 1515 T G |
| EAN/UPC - Product | 6923828637262 |
| Order code | 911401767732 |
| Numerator - Quantity Per Pack | 1 |
| Numerator - Packs per outer box | 10 |
| Material Nr. (12NC) | 911401767732 |
| Copy Net Weight (Piece) | 1.470 kg |



Dimensional drawing

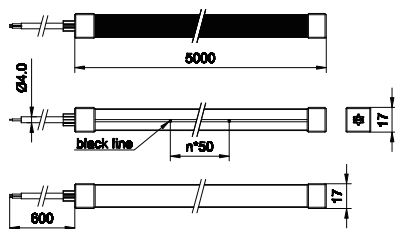

BGC401 650LM 10W 3000K L5 1515 T G

