




Model: SFT8-EX

SPECIFICATION:

- Input Voltage** : 220VAC, 50 / 60Hz
- for Lamp** : SMD LED, LED Tube or T5/T8 Fluorescent Tube
- Fitting Body** : Aluminum Alloy Die Casting
- Glass Cover** : Tempered Glass
- Back-up** : 2, 3 house (Optional)
- Battery Type** : Li-Ion (Optional)
- Installation Type** : Wall, Ceiling, Pendant, Flange...
- Degree of Protection** : IP66
- Corrosion Proof** : W,WF1
- Cable Entries** : Φ 10 /14
- Replacter** : Ex d IIB T6
- Length** : 380, 680,1300mm
- Width** : 145mm
- Highth** : 160mm
- Weigh** : 3.45kgs

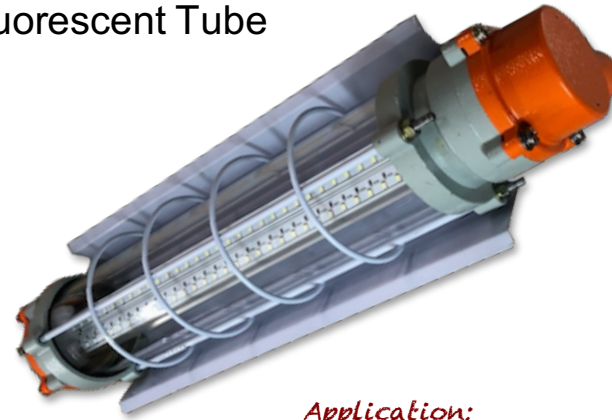

- Benefits:**
- High durability
 - No replace bulb
 - Easy Installation
 - Maintenance Free
 - Power saving 90%

Application:

Widely used in the fields of oil exploitation, chemical industry, spaceflight, war industry ect, hazardous areas. zone1&2 IIA, IIB...



Note: Due to continuous development and improvement, our company reserve the right to change specification without notice