



all in one compactest RECESSED EMERGENCY LIGHT

Model: SLE-R

SPECIFICATION:

- Input Voltage** : 220V+/-10%, 50/60Hz
- Mode of Operation** : Combined Non-maintained
- Lamp** : 1, 3, 5, 6, 9,10,12W White SMD LED with lifespan 50,000 burning hours
- Safety Feature** : Over discharge and over charge protection
- Rated Duration** : 2, 3 hours
- Power Consumption** : 1.5W, 3W
- Fitting Construction** : ABS or Polycarbonate casing
- Mounting** : Recessed
- Diffuser** : Fire retardant cast PC
- Battery Type** : Ni-Cd, Ni-MH
- Unit Dimension(mm)** : 76 X 76 X 68
- Weight** : 0.12Kg
- Test** : Micro button or Wireless TEST by remote control (Optional)
- Compliance** : MS 983, IEC598-2-22



reflector matrix 3D design
ENVIRONMENTALLY FRIENDLY

IP30

Benefits:

- High durability*
- No replace bulb*
- Easy Installation*
- Maintenance Free*
- Power saving 90%*

- * SUPER SMALL
- * SUPER BRIGHT
- * SUPER THIN
- * SUPER LIGHT

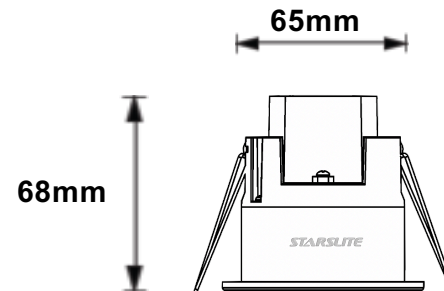

Note: Due to continuous development and improvement, our company reserve the right to change specification without notice