



UNIBollard

BCP211 LED1000/WW 13W 100-240V Rec AL

UNIBollard - 1000 lm - 13 W - 3000 K

UNIBollard is dedicated to light up public environments of park, buildings outside area, compound areas to bring you a more bright light in evening with the safety and convenience. Its graceful appearance is also a part of public scenery to beautify area you live.

Warnings and Safety

- Use additional surge protection device in electrical circuit for lighting wiring.

Product data

General information	
Light source color	830 warm white
Light source replaceable	No
Driver included	Yes
Optical cover/lens type	Polycarbonate bowl/cover opal
Control interface	-
Connection	Screw connection block 3-pole
Cable	Cable 0.3 m with connector 3-pole
Protection class IEC	Safety class I
Flammability mark	-
CE mark	-
Light source engine type	LED
Serviceability class	Class C, luminaire without serviceable parts, not serviceable

Light technical	
Standard tilt angle posttop	-

Operating and electrical	
Input Voltage	100 to 240 V
Input Frequency	50 or 60 Hz
Power Factor (Min)	0.8

Controls and dimming	
Dimmable	No

Mechanical and housing	
Housing Material	Aluminum
Optic material	Polycarbonate
Optical cover/lens material	Polycarbonate
Mounting device	Baseplate
Optical cover/lens finish	Opal
Overall length	130 mm
Overall width	130 mm
Overall height	600 mm

UNIBollard


Color	Aluminum and white
Approval and application	
Ingress protection code	IP65 [Dust penetration-protected, jet-proof]
Mech. impact protection code	IK06 [1 J]
Initial performance (IEC compliant)	
Initial luminous flux (system flux)	1000 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	65 lm/W
Init. Corr. Color Temperature	3000 K
Init. Color Rendering Index	>80
Initial input power	13 W
Power consumption tolerance	+/-10%

Application conditions


Ambient temperature range -40 to +50 °C

Product data

Full product code	911401755242
Order product name	BCP211 LED1000/WW 13W 100-240V Rec AL
Order code	911401755242
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4
Material Nr. (12NC)	911401755242
Copy Net Weight (Piece)	2.500 kg



Dimensional drawing

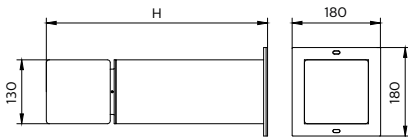

	mm
BCP210	450
BCP211	500
BCP212	1000

BCP211 LED1000/WW 13W 100-240V Rec AL

