



Uni Line Inground_Wall washer

BBP420 LED RGBW 24V B2/HC L120 DMX

Uni Line Inground_Wall washer - 1010 lm - 36 W - -

Philips UniLine in-ground wall washer is our latest recessed luminaire for outdoor applications. Designed to enhance surroundings in subtle or dramatic ways, this discreet luminaire offers a choice of LED colors and beam angles. So you can light up façades and landscapes with dynamic lighting effects without exposing the body of the device. And because it's compatible with Uni DMX controls and 3rd party standard DMX controls, it's easy to handle too.

Warnings and Safety

- For outdoor use only

Product data

General information		Input Frequency	
Light source color	RGBW		- Hz
Driver included	No	Power Factor (Min)	1
Optical cover/lens type		Controls and dimming	
Optical cover/lens type	Lens	Dimmable	Yes
Control interface	Dynamic DMX	Mechanical and housing	
Connection	-	Housing Material	Aluminum
Cable	-	Optical cover/lens material	Acrylate
Protection class IEC	Safety class III	Color	Aluminum
Flammability mark	-	Dimensions (Height x Width x Depth)	NaN x NaN x NaN mm
CE mark	CE mark		
Operating and electrical			
Input Voltage	24 V		

Uni Line Inground_Wall washer

Approval and application

Ingress protection code	IP67 [Dust penetration-protected, watertight]
Mech. impact protection code	IK10 [20 J vandal-resistant]

Initial performance (IEC compliant)

Initial luminous flux (system flux)	1010 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	28.05555555555557 lm/W
Init. Corr. Color Temperature	-
Init. Color Rendering Index	-
Initial input power	36 W
Power consumption tolerance	+/-10%

Application conditions


Ambient temperature range	-40 to +50 °C
---------------------------	---------------

Product data

Full product code	871951452509299
Order product name	BBP420 LED RGBNW 24V B2/HC L120 DMX
EAN/UPC - Product	8719514525092
Order code	911401523081
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	2
Material Nr. (12NC)	911401523081
Net Weight (Piece)	5.190 kg



Dimensional drawing

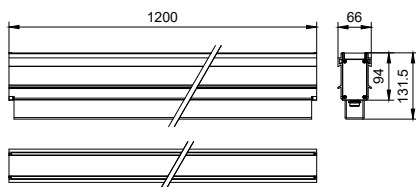

BBP420 LED RGBNW 24V B2/HC L120 DMX

