



Mini500 G3

BBP500 G2 LED180/CW ACD2 IS S-MB

865 cool daylight - Medium beam

The Mini 500 G3 is designed for petrol-station canopies and low/high-bay applications, this ultra-efficient retrofit fixture offers outstanding light quality, effective thermal management and a long lifespan. For further energy savings, you could select either simple movement-detector sensor or movement detection combined with a daylight sensor.

Product data

| General Information | |
|-------------------------------|--|
| Light source colour | 865 cool daylight |
| Light source replaceable | No |
| Number of gear units | 1 unit |
| Driver/power unit/transformer | PSD [Power supply unit with DALI interface] |
| Driver included | Yes |
| Optic type | MB [Medium beam] |
| Optical cover/lens type | GT [Tempered glass] |
| Luminaire light beam spread | 90° |
| Control interface | DALI |
| Connection | Flying leads/wires |
| Cable | Cable 0.3 m without plug |
| Protection class IEC | Safety class I (I) |
| Glow-wire test | 650/5 [Temperature 650 °C, duration 5 s] |
| Flammability mark | F [For mounting on normally flammable surfaces] |
| CE mark | CE mark |
| ENEC mark | - |
| Warranty period | 3 years |
| Constant light output | No |

| Number of products on MCB (16 A type B) | | 6 |
|---|-------------------|---|
| Light source engine type | LED | |
| Operating and Electrical | | |
| Input Voltage | 220 to 240 V | |
| Input frequency | 50 to 60 Hz | |
| Inrush current | 53 A | |
| Inrush time | 300 ms | |
| Power factor (min.) | 0.95 | |
| Controls and Dimming | | |
| Dimmable | Yes | |
| Mechanical and Housing | | |
| Housing material | Aluminum die-cast | |
| Reflector material | - | |
| Optic material | Polycarbonate | |
| Optical cover/lens material | Tempered glass | |
| Fixation material | - | |
| Optical cover/lens finish | Clear | |

Mini500 G3

| | |
|----------------|--------|
| Overall length | 400 mm |
| Overall width | 400 mm |
| Colour | White |

Approval and Application

| | |
|------------------------------|---|
| Ingress protection code | IP54 [Dust accumulation-protected, splash-proof] |
| Mech. impact protection code | IK07 [2 J reinforced] |

Initial Performance (IEC Compliant)

| | |
|-------------------------------------|---------------------|
| Initial luminous flux (system flux) | 18000 lm |
| Luminous flux tolerance | +/-10% |
| Initial LED luminaire efficacy | 129 lm/W |
| Init. Corr. Colour Temperature | 6500 K |
| Init. Colour rendering index | >80 |
| Initial chromaticity | (0.313.0.324)SDCM<5 |
| Initial input power | 140 W |
| Power consumption tolerance | +/-10% |

Over Time Performance (IEC Compliant)

| | |
|---------------------------|---------|
| Median useful life L70B50 | 50000 h |
|---------------------------|---------|

| | |
|---------------------------|---------|
| Median useful life L80B50 | 40000 h |
| Median useful life L90B50 | 30000 h |

Application Conditions


| | |
|-------------------------------|---------------|
| Ambient temperature range | -20 to +40 °C |
| Maximum dimming level | 10% |
| Suitable for random switching | Yes |

Product Data

| | |
|-----------------------------------|----------------------------------|
| Full product code | 911401534551 |
| Order product name | BBP500 G2 LED180/CW ACD2 IS S-MB |
| Order code | 01534551 |
| SAP numerator – quantity per pack | 1 |
| Numerator – packs per outer box | 1 |
| SAP material | 911401534551 |
| SAP net weight (piece) | 8.099 kg |



Dimensional drawing

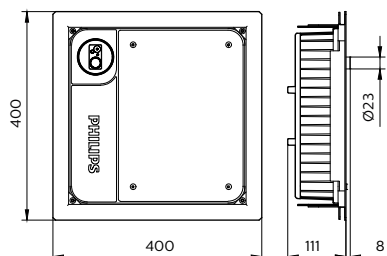

BBP500 G2 LED180/CW ACD2 IS S-MB

