



Mini500 G3

BBP500 G2X LED140/NW PIR S-MB

840 neutral white - Medium beam

Mini 500 G3 is designed for petrol-station canopies and low/high-bay applications, this ultra-efficient retrofit fixtures offer outstanding light quality, effective thermal management, and a long lifespan. For further energy savings, you could select either simple movement detector sensor or movement detection combined with a daylight sensor.

Product data

General Information	
Light source color	840 neutral white
Light source replaceable	No
Number of gear units	1 unit
Driver/power unit/transformer	PSR [Power supply unit regulating]
Driver included	Yes
Optic type	MB [Medium beam]
Optical cover/lens type	GT [Tempered glass]
Luminaire light beam spread	90°
Control interface	-
Connection	Flying leads/wires
Cable	Cable 0.3 m without plug
Protection class IEC	Safety class I (I)
Glow-wire test	650/5 [Temperature 650 °C, duration 5 s]
Flammability mark	F [For mounting on normally flammable surfaces]
CE mark	CE mark
ENEC mark	-
Warranty period	3 years
Constant light output	No

Number of products on MCB of 16 A type B 4	
Light source engine type	LED
Operating and Electrical	
Input Voltage	220 to 240 V
Input Frequency	50 to 60 Hz
Inrush current	46 A
Inrush time	440 ms
Power Factor (Min)	0.95
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Housing Material	Aluminum die-cast
Reflector material	-
Optic material	Polycarbonate
Optical cover/lens material	Tempered glass
Fixation material	-
Optical cover/lens finish	Clear

Mini500 G3

Overall length	400 mm
Overall width	400 mm
Color	White

Approval and Application

Ingress protection code	IP54 [Dust accumulation-protected, splash-proof]
Mech. impact protection code	IK07 [2 J reinforced]

Initial Performance (IEC Compliant)

Initial luminous flux (system flux)	14000 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	140 lm/W
Init. Corr. Color Temperature	4000 K
Init. Color Rendering Index	>80
Initial chromaticity	(0.38.0.38)SDCM<5
Initial input power	100 W
Power consumption tolerance	+/-10%

Over Time Performance (IEC Compliant)

Median useful life L70B50	50000 h
---------------------------	---------

Median useful life L80B50	40000 h
Median useful life L90B50	30000 h

Application Conditions


Ambient temperature range	-20 to +45 °C
Maximum dim level	25%
Suitable for random switching	Yes

Product Data

Full product code	911401533151
Order product name	BBP500 G2X LED140/NW PIR S-MB
Order code	911401533151
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1
Material Nr. (12NC)	911401533151
Net Weight (Piece)	8.099 kg



Dimensional drawing

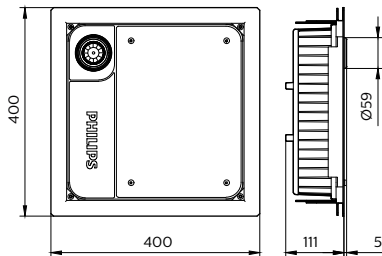

BBP500 G2X LED140/NW PIR S-MB

