



Truefashion Projector GCGM

RS700B LED30 930PW PSU NB WH

Lens -

Truefashion Projector is offering a retail segment with attractive outlook design, excellent quality of light & dedicated light recipe as well as system connectivity, to create a comfortable ambiance and impressive shopping experience to stimulate the store sales for retail customers.

Warnings and Safety

- 3 years

Product data

General information	
Light source color	930 warm white
Optical cover/lens type	Lens
Control interface	-
Protection class IEC	Safety class II
CE mark	CE mark
Number of products on MCB of 16 A type B	1
Light source engine type	LED

Operating and electrical	
Input Voltage	220 to 240 V
Input Frequency	50 or 60 Hz
Power Factor (Min)	0.95

Controls and dimming	
Dimmable	No

Mechanical and housing	
Housing Material	Aluminum
Optical cover/lens material	Polymethyl methacrylate
Optical cover/lens finish	-
Overall height	100 mm
Overall diameter	111 mm
Color	White RAL 9003

Approval and application	
Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	-

Truefashion Projector GCGM

Initial performance (IEC compliant)

Initial luminous flux (system flux)	2879 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	93 lm/W
Init. Corr. Color Temperature	3000 K
Init. Color Rendering Index	>90
Initial input power	31 W
Power consumption tolerance	+/-10%

Application conditions


Ambient temperature range	-15 to +35 °C
---------------------------	---------------

Product data

Full product code	911401520671
Order product name	RS700B LED30 930PW PSU NB WH
Order code	911401520671
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1
Material Nr. (12NC)	911401520671
Copy Net Weight (Piece)	0.630 kg



Dimensional drawing

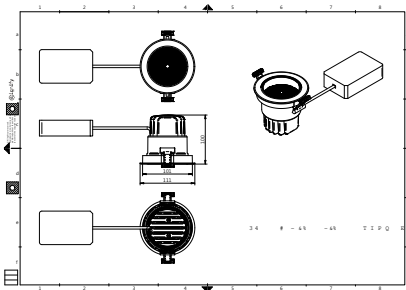

RS700B LED30 930PW PSU NB WH

